

Code: 1014A 3 Way Ball Valve CS Body Screwed End 150 Class (L Port).

FEATURES:


- Blow-Out Proof Stem.
- Low emission packing.
- Seating is available for all 3 ports.
- ISO 5211 Mounting Pad (On Request)

Codes & Standards:

- General design & mfg: BS EN ISO 17292 / ASME B 16.34
- Valve face-to-face dimensions: As per Mfg. Standard.
- End Connection: Screwed End to BSP-F
- Valve inspection and testing: API 598 / ISO 5208

Technical Specifications:

- Valve type: 3 Way L-port
- Seat type: Soft Seat
- End Connection: Screwed End to BSP-F
- Size range: ½ inch to 3 inch (15mm to 80mm)
- Pressure Rating: ASA 150 Class
- Operating Temperature Range: -38 deg C to 200 deg. C
- Seat leakage: Class VI - Soft Seat.
- Operation: Hand Lever / Actuated

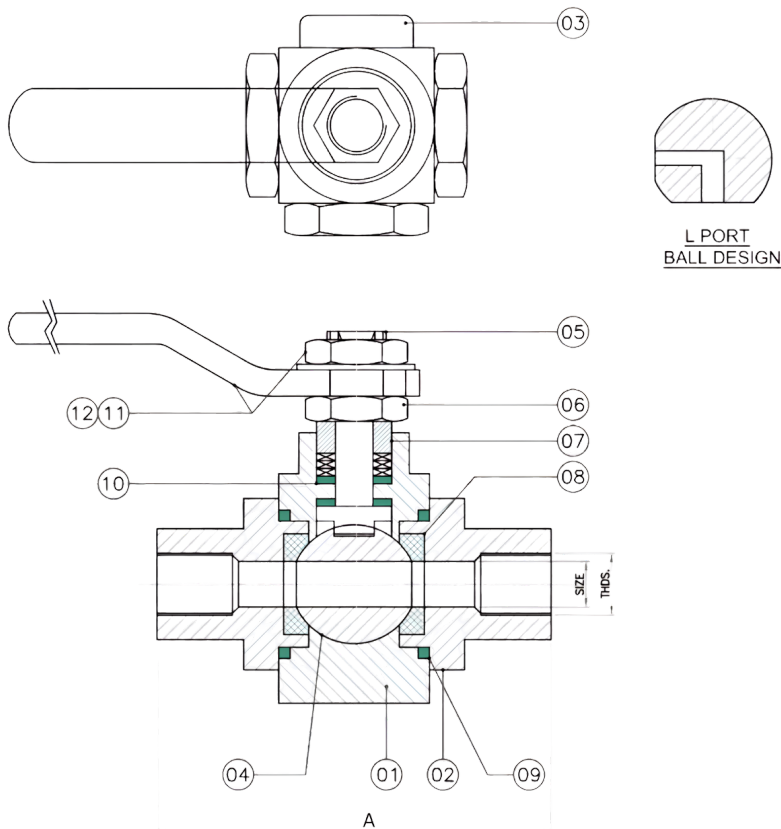

Sr. No.	Part Name	Material	QTY.
1	Body	Carbon Steel	01
2	Body Connector	Carbon Steel	02
3	Body End Cap	Carbon Steel	01
4	Ball	SS 304	01
5	Stem	SS 304	01
6	Gland Nut	SS304	01
7	Gland Bush	SS304	01
8	Seat Ring	PTFE	1 Set
9	Body Seal	PTFE	1 Set
10	Stem Seal	PTFE	1 Set
11	Lock Nut	C.S	01
12	Lever	M.S	01

ASA 150 Class		
Size (mm)	A (mm)	BSP-F
15	75	½"
20	80	¾"
25	100	1"
32	110	1 ¼"
40	130	1 ½"
50	145	2"
65	165	2 ½"
80	175	3 inch

Pressure Test (Hydraulic):

As per ASA 150 Class

Body: 32 Kgs / cm²

Seat: 22 Kgs / cm²

Seat (Pneumatic):

07 Kgs / cm²